

Parallel clamps and area pressure clamps

Large-area clamping and spreading

The evolution of the
REVO body clamp



Ideal for sensitive workpieces and right angles

The large, perfectly parallel jaw faces are characteristic of the original BESSEY K Body REVO parallel clamp. It allows easy clamping and spreading of sensitive surfaces and right angles. Even round and pointed workpieces. And the best thing is: thanks to

their extra-large contact surfaces, the original BESSEY K Body REVO parallel clamp and the lightweight parallel clamp UniKlump are both universally applicable – even behind and to the side of the high-quality profiled rail. This allows you to clamp in locations that conventional screw clamps are unable to reach. That's guaranteed!

REVO Evolution parallel clamp



The evolution of the REVO – greater power and safety in a new design

Precise and gentle

Workpieces with sensitive surfaces can be clamped and spread exactly parallel to each other – even behind and on the side of the rail. Corners and recessed edges as well as pointed and round surfaces can also be perfectly aligned:

- due to extremely large clamping surfaces that are attached perpendicular to the rail
- due to three removable pressure caps that are repellent to glue, and also resistant to paint and grease solvents
- due to workpiece supports that prevent the workpiece from coming into contact with the rail



Powerful and safe

They securely clamp with a clamping force of up to 8,000 N:

- due to the metal-reinforced plastic housing
- due to the optimised sliding arm with double slide protection: It holds the clamp reliably with the set clamping force and prevents any unintentional slipping of the sliding arm in the unclamped condition



REVOLUTION

Versatile and well thought out

The clamps provide an enormous number of possible applications:

- due to ingenious accessories, such as tilting adapter, frame press set, clamp extension and table clamp
- the ergonomically formed 2-component symmetrical plastic handle with hexagon socket means the clamping force can be comfortably applied (max. torque 17 Nm)
- the continuously adjustable head for the KREV Vario version enables the clamp to be positioned in the middle of the workpiece for optimum weight distribution



You Tube



Parallel clamps and area pressure clamps



- Clamping force up to 8,000 N
- Very large parallel clamping surfaces with 3 removable pressure caps
- Metal-reinforced plastic housing and optimised sliding arm with double slide protection for more power and safety: The set clamping force is maintained and the sliding arm cannot unintentionally slip in the unclamped condition
- Can be converted without tools for spreading tasks
- High-quality 2-component symmetrical plastic handle with hexagon socket for the comfortable application of the clamping force (max. torque 17 Nm)
- KREV with continuously adjustable and fixable upper section for optimum positioning on the workpiece




Vario K Body REVO parallel clamp KREV

N ^o	←a→	←b→	←e→	←x→	⚖	📦	€
	mm	mm	mm	mm	kg	qty.	V3
KREV100-2K	1000	95	260-1130	29 x 9	3.77	2	88,40
KREV150-2K	1500	95	260-1610	29 x 9	4.25	2	108,60
KREV200-2K	2000	95	260-2080	29 x 9	5.30	2	128,60
KREV250-2K	2500	95	260-2580	29 x 9	6.30	2	148,70

K Body REVO parallel clamp KRE

N ^o	←a→	←b→	←e→	←x→	⚖	📦	€
	mm	mm	mm	mm	kg	qty.	V3
KRE30-2K	300	95	255-390	29 x 9	2.15	2	52,90
KRE60-2K	600	95	255-730	29 x 9	2.76	2	65,10
KRE80-2K	800	95	255-930	29 x 9	3.10	2	74,30
KRE100-2K	1000	95	255-1130	29 x 9	3.45	2	82,50
KRE125-2K	1250	95	255-1355	29 x 9	3.87	2	92,80
KRE150-2K	1500	95	255-1610	29 x 9	4.28	2	102,40
KRE200-2K	2000	95	255-2080	29 x 9	5.09	2	122,20
KRE250-2K	2500	95	255-2580	29 x 9	6.05	2	143,00



Parallel clamps and area pressure clamps



Variable jaw KRE-VO



N ^o	Suitable for	kg	qty.	€
KRE-VO	KRE / KREV / KR / KRV	0.59	1	20,60



- Steplessly adjustable and fixable upper section for improved workpiece positioning
- Very large parallel clamping surfaces
- With 2 pressure caps to protect delicate surfaces
- Can be converted to spreading function with no need for tools



Framing set KP




N ^o	Suitable for	kg	qty.	€
KP	KRE / KREV / KR / KRV	0.55	1	29,60

Contents: 4 rail couplings and 4 adapters



- KP Framing System (from 30 cm to 250 cm / 12"-98") with four 90° KP Blocks
- Separately adjustable clamping force with 2 inserted clamps per corner
- Lightweight / easy to assemble
- On carded hang pack

Parallel clamps and area pressure clamps

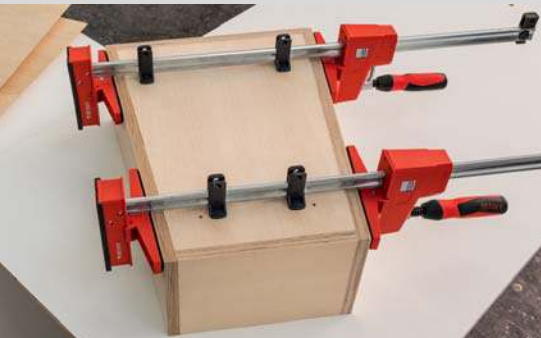


- Adapter with tilting clamping jaws with a tilt range of -15° to $+15^\circ$
- Clamping on sloping and parallel surfaces
- On carded hang pack



Tilting K Body clamp adapter KR-AS (2 pcs./bag)

N ^o	Suitable for					€
		mm	mm	kg	qty.	V3
KR-AS	KRE / KREV / KR / KRV	170	25	0.18	12	13,70



- Connect any two K Body parallel clamps to increase the clamping capacity. The connector is made of robust aluminum.
- On carded hang pack



K Body parallel clamp extender KBX

N ^o	Suitable for			€
		kg	qty.	V3
KBX20	KRE / KREV / KR / KRV	0.75	12	19,40

- Especially for DIY applications and domestic appliances
- Special accessory for angle clamps WS 3/WS 6, screw clamp S 10 and K Body REVO parallel clamps KRE/KREV and KR/KRV to hold them to a work surface edge



Table clamp

N ^o	∅	← a →	← b →			€
	mm	mm	mm	kg	qty.	V3
TK6	8	60	22	0.10	10	4,10
RB269	8	60	28	0.19	1	8,70
LM10/5R8	8	100	50	0.22	1	19,90



Parallel clamps and area pressure clamps



Lightweight parallel clamp UK UniKlamp



N ^o	<a>		<e>	<x>	kg	qty.	€ V3
	mm	mm	mm	mm			
UK16	160	80	172-270	20 x 5	0.62	6	20,40
UK30	300	80	172-415	20 x 5	0.72	6	20,70
UK60	600	80	172-720	20 x 5	0.93	6	22,00

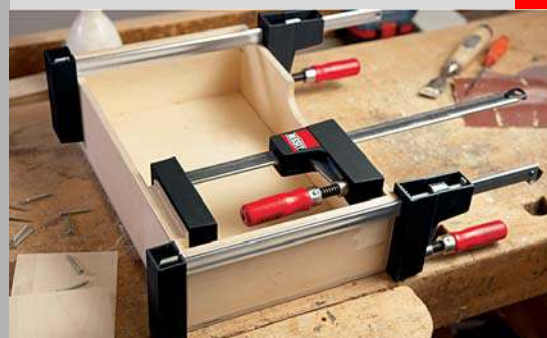

- Clamping force up to 1,500 N
- Parallel jaw faces with extra-large contact surfaces
- Clamping of various shapes, along the whole length of the rail
- Universally applicable
- Light and easy-to-handle
- No need for tools for switching between clamping and spreading
- On carded hang pack



Area pressure clamps FK




N ^o	<a>		<x>	kg	qty.	€ V3
	mm	mm	mm			
FK16-8	160	80	16 x 7.5	0.60	10	34,20
FK20-10	200	100	19.5 x 9.5	1.10	10	43,40
FK40-10	400	100	19.5 x 9.5	1.40	5	49,10

- Clamping force up to 5,000 N
- 2 large, tilting jaw faces
- For workpieces with a sloping contact surface
- Large-area clamping of all workpieces from both sides



Box clamp KS



N ^o	<a>		kg	qty.	€ V3
	mm	mm			
KS100	200-1000	16	3.23	1	110,90
KS150	200-1500	16	3.94	1	123,90
KSV	Extension 1000	-	1.55	1	56,00



- Clamping force up to 5,000 N
- Infinitely adjustable clamping jaws
- Clamp on angled and parallel surfaces